


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00010	Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	2	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00016	Overmold, PVC, black	2	

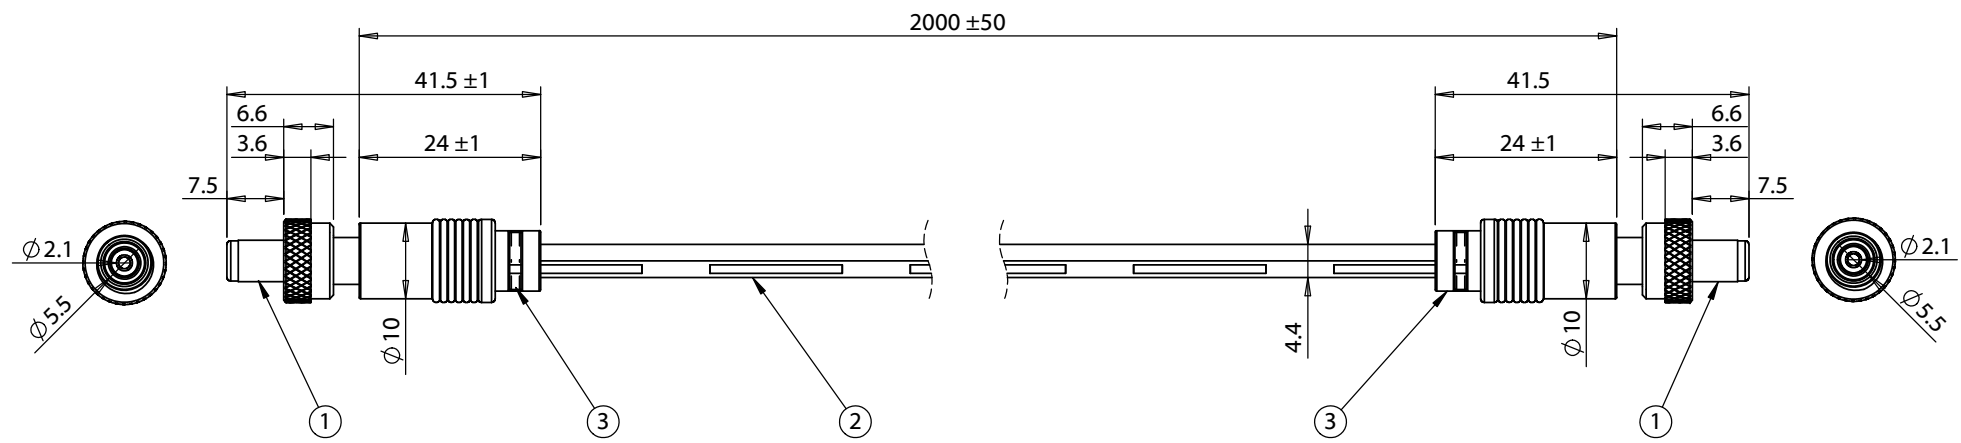

Notes:

Electrical requirement: 7 A, 48 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram		
50-00010	wire color	50-00010
center	black with stripe	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	5/28/2009	Initial release		RoHS compliant		
A1	2/6/2012	Updated connector description	Verified:	Function test: no open, no short circuit, no intermittent		
A2	7/30/2012	Included wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 2000 mm, 5.5x2.1x7.5mm 50-00010 locking dc plug to same, 18 AWG, UL2468, 30-00007 wire		
A3	8/19/2016	Added overall length to connector & overmold			Size: A	Part number: 10-00111
					Scale: 1:2	Sheet 1 of 1