

part number: description:

50-00049

Connector, dc jack, 5.9x3.0x1.1xL18.5 mm,

EIAJ-4, molding style

date: October 16, 2009 rev: A

page: 1 of 2


Materials:

1	phosphor-bronze, nickel-plated, 2µm min.
2	phosphor-bronze, tin-plated, 2µm min.
3	phosphor-bronze, nickel-plated, 2µm min.
4	brass, nickel-plated, 2µm min.
5	PBT, 30% glass-filled, black
6	POM, vellow

Notes:

RoHS compliant

Mechanical drawing:

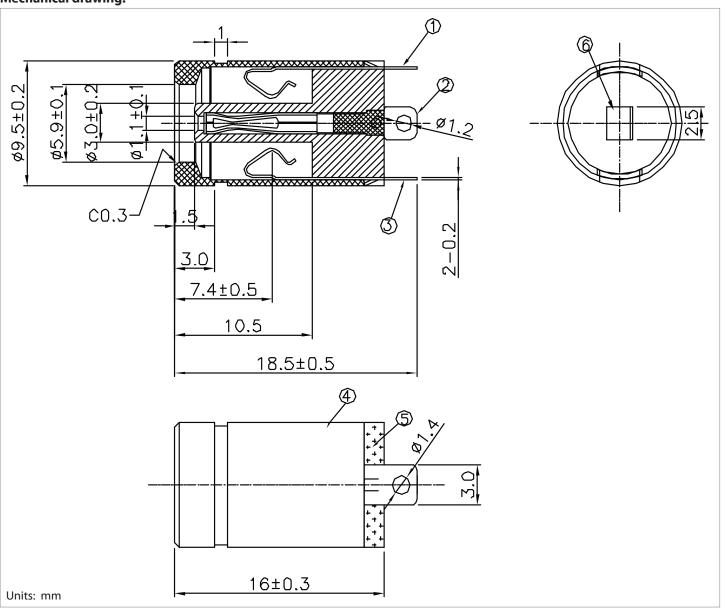

tolerance X: $\pm 0.5 \, \text{mm}$.X: $\pm 0.3 \, \text{mm}$.XX: $\pm 0.05 \, \text{mm}$ applicable unless otherwise indicated in specification or on drawings

Initial Date



50-00049

Connector, dc jack, 5.9x3.0x1.1xL18.5 mm,

EIAJ-4, molding style

date: October 16, 2009

rev: Α page: 2 of 2

				-	
Rev	/ICI	On.	nc	۱ta	c.
116	יוכוע	VII.	ш	νc	э.

Rev	Date	Description				
A	October 16, 2009	initial release				

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title ————
Name	Date
Company	Branch