

part number: description:

50-00136

Connector, dc plug, 4.0x1.7xL19.5 mm, spring contacts, brass nickel plated, yellow

spring contacts, brass nickel plated insulator

date: August 13, 2015 rev: A3 page: 1 of 2


Materials:

1	PBT + 15% GF, yellow
2	brass, nickel-plated, 2 µm min.
3	P-bronze, nickel-plated, 2 μm min.

Notes:

RoHS compliant

Mechanical drawing:

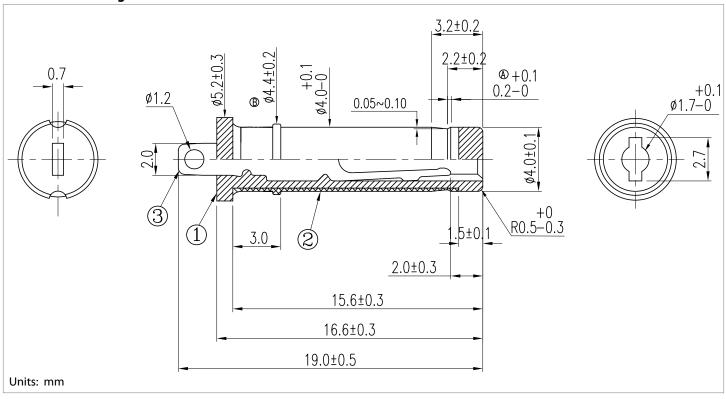

tolerance X: $\pm 0.5 \, \text{mm}$.X: $\pm 0.3 \, \text{mm}$.XX: $\pm 0.05 \, \text{mm}$ applicable unless otherwise indicated in specification or on drawings

Initial Date



50-00136

Connector, dc plug, 4.0x1.7xL19.5 mm, spring contacts, brass nickel plated, yellow

insulator

date: August 13, 2015

rev: A3 page: 2 of 2

Revision notes:

Rev	Date	Description
Α	January 9, 2012	initial release
A1	June 27, 2012	updated length
A2	May 9, 2014	updated part
A3	August 13, 2015	updated unsulator color to yellow

Prepared:	Verified:

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title ————
Name	Date
Company	Branch