


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00423	Connector, mono plug, 6.3 mm, right angle, shielded handle, assembly type	1	
2	30-00811	Wire, 2C TS, 24 AWG, 30V, 80C, 4.0 mm, braid shield, TPE, 70A	1	
3	Heat shrink	Heat shrink tube	1	black, covers stripped end, cut flush with connector body
4	Heat shrink	Heat shrink tube	1	black, covers stripped end
5	Heat shrink	Heat shrink tube	1	black, covers shield

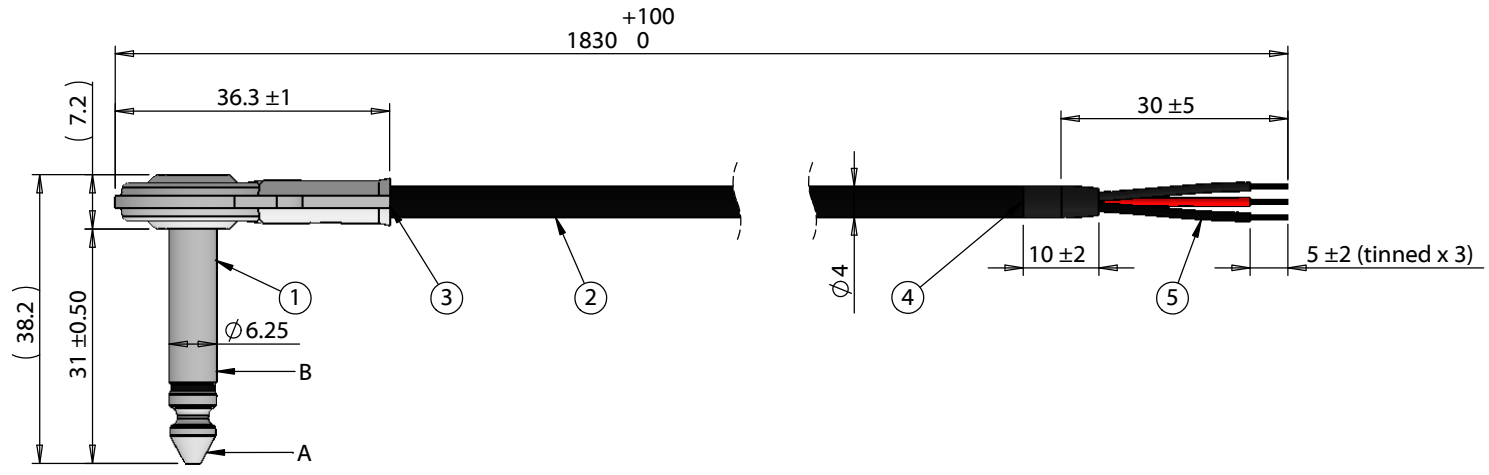

Screw torque:  
2.8 kgf/cm ±0.5

Wiring Diagram	
50-00423	wire color
A	Red
B	Black
-	Shield

Revision:	Date:	Description:	Prepared:	Notes:
A	9/20/2016	Initial release		RoHS and REACH compliant
A1	12/13/2016	Modified heat shrink and added torque spec	Verified:	Function test: no open, no short circuit, no intermittent
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 6.3 mm 2C 50-00423 audio plug to 5 mm tinned, 24 AWG, 30-00811, shielded

# TENSILITY

tel 1.541.323.3228 800 877.670.7118  
fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	10-02281
Scale: 1:1	Sheet 1 of 1