


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00586	Connector, dc plug, 5.5x2.5xL20.5 mm, molding style, spring contacts, no detent	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00046	Overmold, PVC	1	black

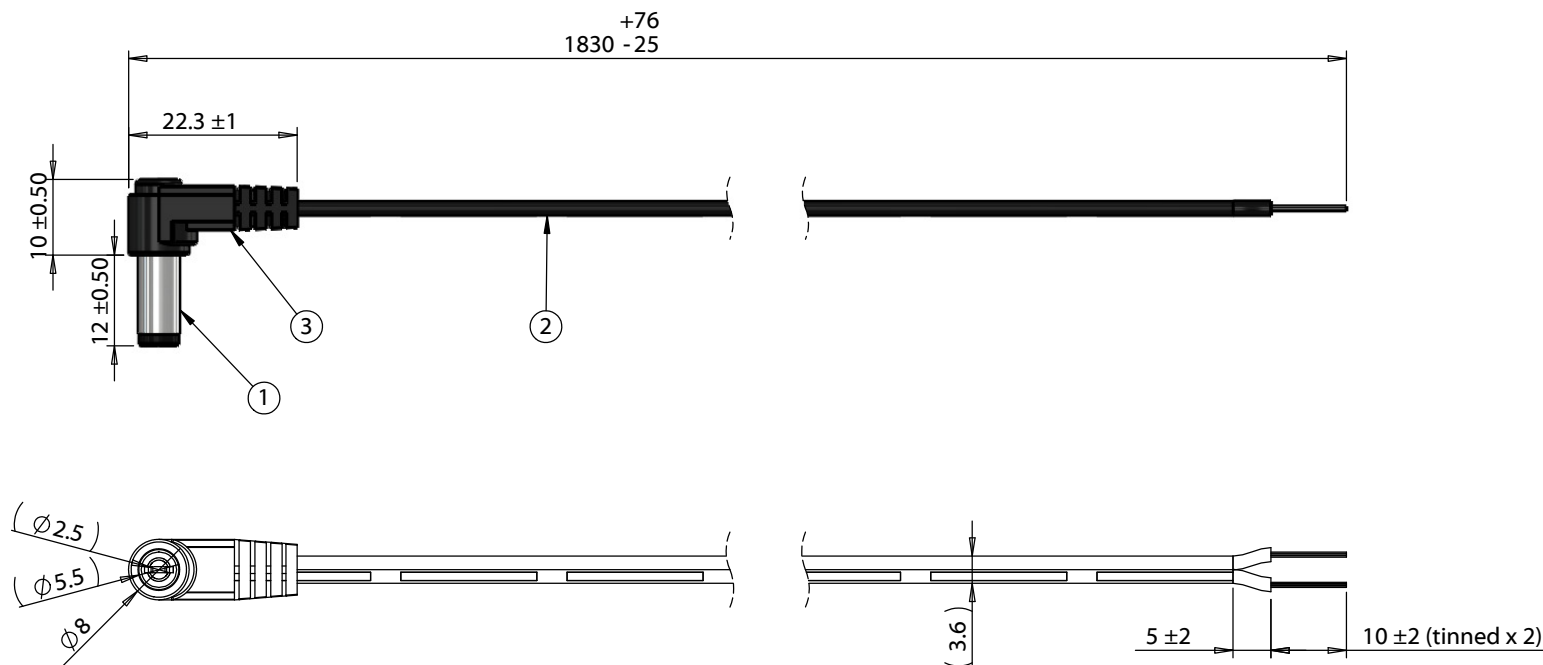

Wiring Diagram	
50-00586	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	8/3/2017	Initial release	Verified:			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent Description: Cable, 1830 mm, 5.5x2.5x12 mm, 90° 50-00042 dc plug to stripped tinned, 24 AWG, 30-00003 wire	Size:	Part number:
					A	10-02820
					Scale: 1:1	Sheet 1 of 1

5 4 3 2 1