


Ratings
 Voltage: 300 V
 Current: 2.0 A

Operating Temperature Range
 -55 to 220 °C

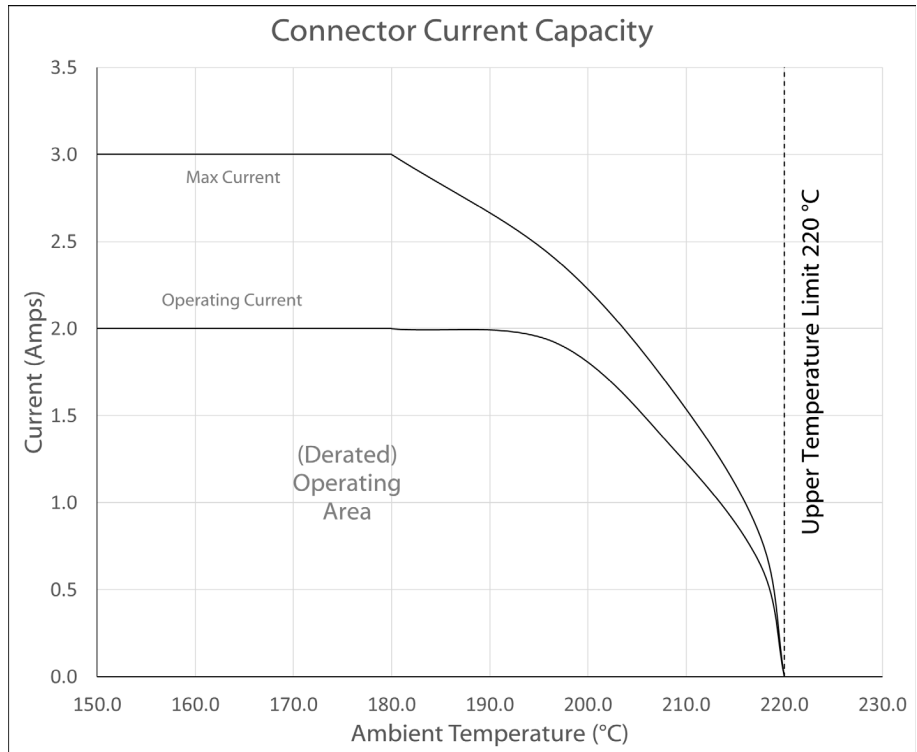

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings, mating cables, or other circuitry. Operating current curve (derated by 20% of maximum values) accounts for external factors, and manufacturing variation.

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/27/2017	Initial Release	AG <small>Digitally signed by AG Date: 2017.12.27 11:01:41 -08'00'</small>	RoHS compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	Size: A
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Connector, PPL7, 7C, 0° socket, 7x35 mm, chrome, solder, Ø4.2-5.2 mm wire	Part number: 51-00026.52
					Scale: 2:1
					Sheet 2 of 2