
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00932	Connector, 3C, 3.0 mm pitch single row rectangular housing socket, Nylon 66, UL94V-0	2	black, mates with most 3.0 mm pitch single row rect. plugs
2	55-00113	Crimp Terminal, 3.0 mm pitch, female, 20-24 AWG, tin plated	6	
3	30-00368	Wire, 3C TS, 20 AWG, UL2464, 300V, 80C, 4.95 mm, VW-1, PVC	1	
4	24-00309	Overmold, 3C, 3.0 mm pitch single row rectangular housing socket	2	PVC, black

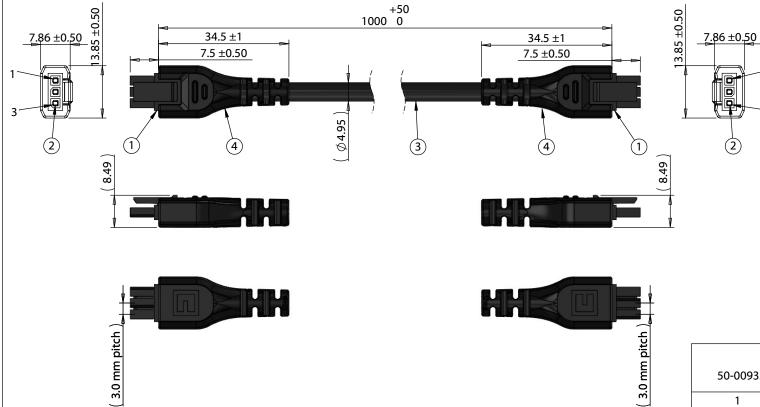

Wiring Diagram					
50-00932	wire color	50-00932			
1	red	1			
2	black	2			
3	white	3			

Revision:	Date:	Description:	Prepared:	Notes:
Α	10/28/2019	Initial release	W .G .	RoHS compliant
			Verified:	Function test: no intermittent
			Dimensions are in	
			millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1000 mm, rectangular hous

Functionally equivalent components may be substituted

5

Notes:

RoHS compliant

Function test: no open, no short circuit, no ntermittent

Description:

Cable, 1000 mm, 3C, 3.0 mm pitch single row ectangular housing socket to same, overmold

TENSILITY

tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com

Size:	Part number:			
Α	10-03419			
Scale:	1:1		Sheet 1 of 1	

3 2