


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00933	Connector, 4C, 3.0 mm pitch dual row rectangular housing socket, Nylon 66, UL94V-0	1	black, mates with most 3.0 mm pitch dual row rect. plugs
2	55-00113	Crimp Terminal, 3.0 mm pitch, female, 20-24 AWG, tin plated	4	
3	30-00383	Wire, 4C TS, 20 AWG, UL2464, 300V, 80C, 5.3 mm, VW-1, PVC	1	
4	24-00310	Overmold, 4C, 3.0 mm pitch dual row rectangular housing socket	1	PVC, black

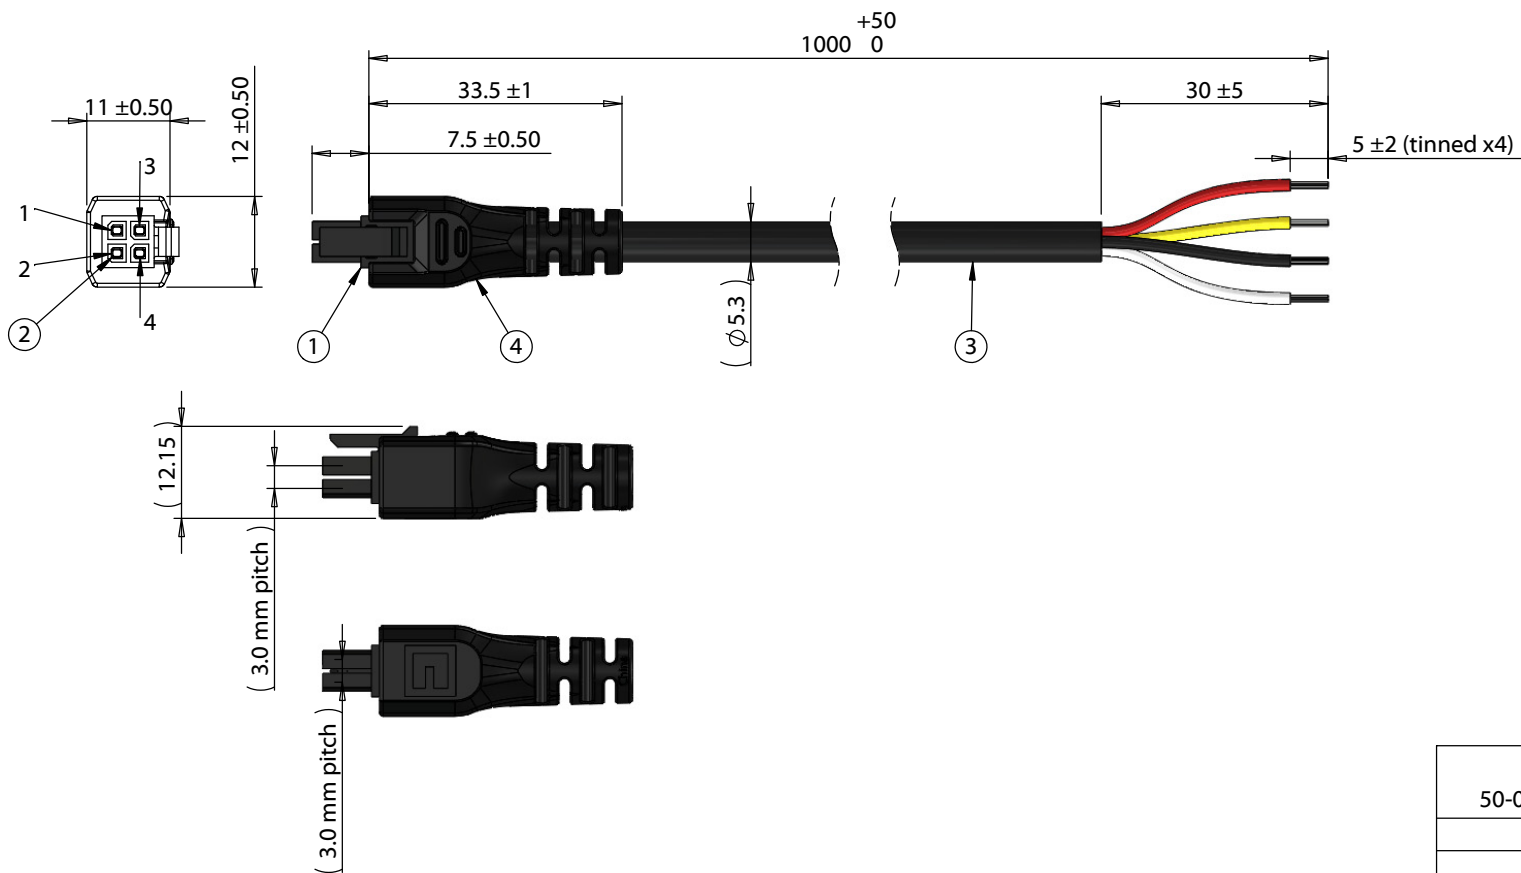

Notes:
Functionally equivalent components may be substituted

Wiring Diagram	
50-00933	wire color
1	red
2	black
3	white
4	yellow

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			
A	10/29/2019	Initial release	Verified:	RoHS compliant				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent				
				Description:	Cable, 1000 mm, 4C, 3.0 mm pitch dual row rectangular housing socket to stripped tinned, overmold	Size:	Part number:	
						A	10-03440	
					Scale:	1:1		Sheet 1 of 1