


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00935	Connector, 8C, 3.0 mm pitch dual row rectangular housing socket, Nylon 66, UL94V-0	1	black, mates with most 3.0 mm pitch dual row rect. plugs
2	55-00113	Crimp Terminal, 3.0 mm pitch, female, 20-24 AWG, tin plated	8	
3	30-01313	Wire, 8C TS, 20 AWG, UL2464, 300V, 80C, 7 mm, VW-1, PVC, 60P	1	
4	24-00312	Overmold, 8C, 3.0 mm pitch dual row rectangular housing socket	1	PVC, black

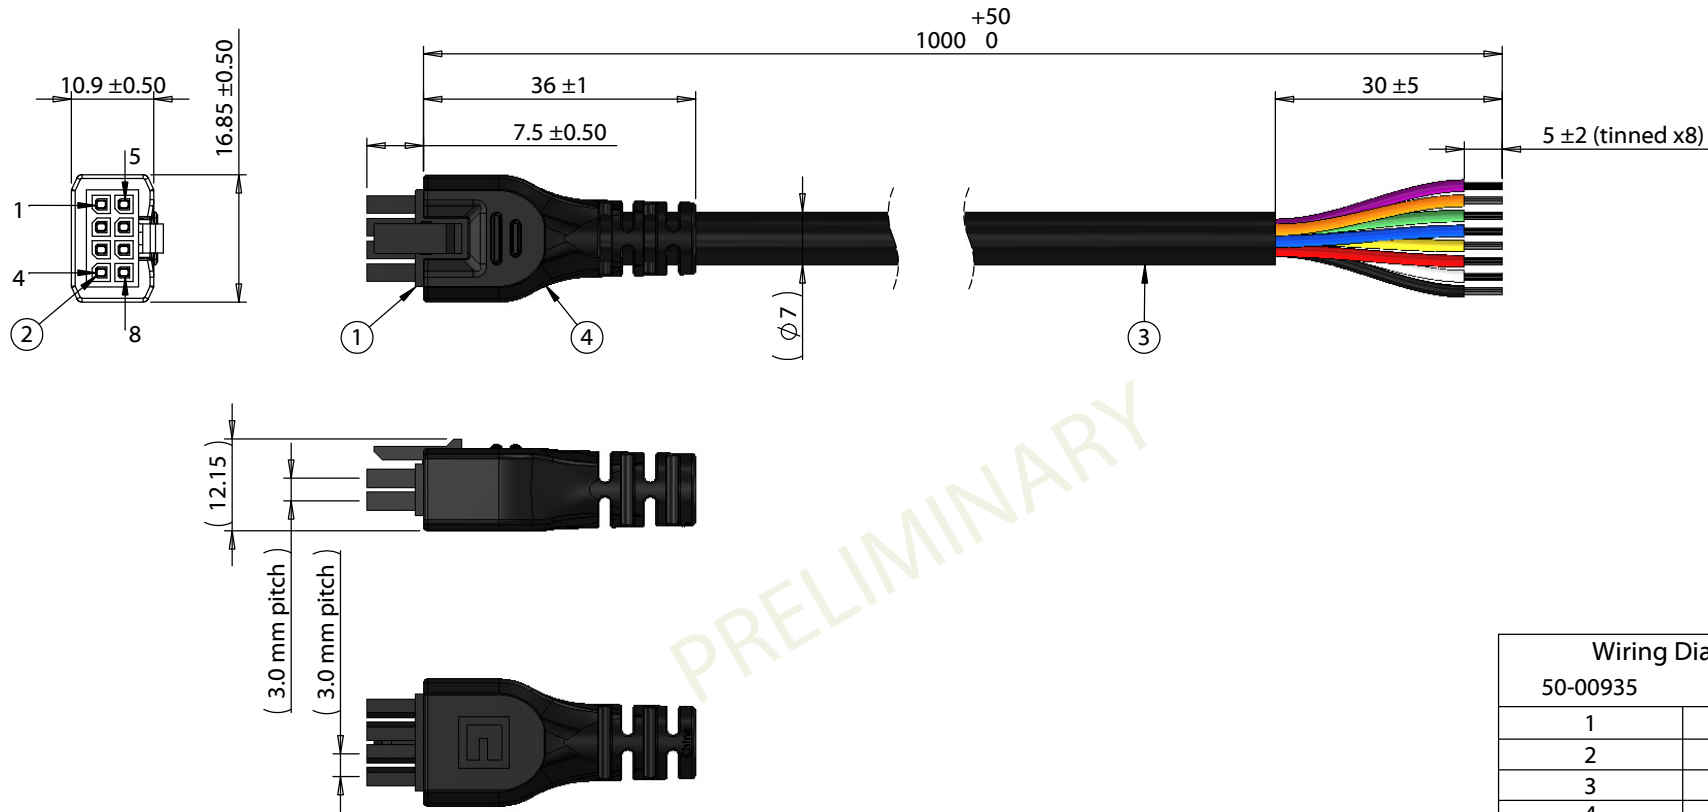

Notes:
Functionally equivalent components may be substituted

Wiring Diagram	
50-00935	wire color
1	red
2	black
3	white
4	yellow
5	blue
6	green
7	orange
8	purple

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	10/29/2019	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1000 mm, 8C, 3.0 mm pitch dual row rectangular housing socket to stripped tinned, overmold	Size: A
					Part number: 10-03446
					Scale: 1:1
					Sheet 1 of 1

5

4

3

2

1