


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00936	Connector, 10C, 3.0 mm pitch dual row rectangular housing socket, Nylon 66, UL94V-0	1	black, mates with most 3.0 mm pitch single row rect. plugs
2	55-00113	Crimp Terminal, 3.0 mm pitch, female, 20-24 AWG, tin plated	10	
3	30-01337	Wire, 10C TS, 20 AWG, UL2464, 300V, 80C, 7.8 mm, VW-1, PVC, 60P	1	
4	24-00313	Overmold, 10C, 3.0 mm pitch dual row rectangular housing socket	1	PVC, black

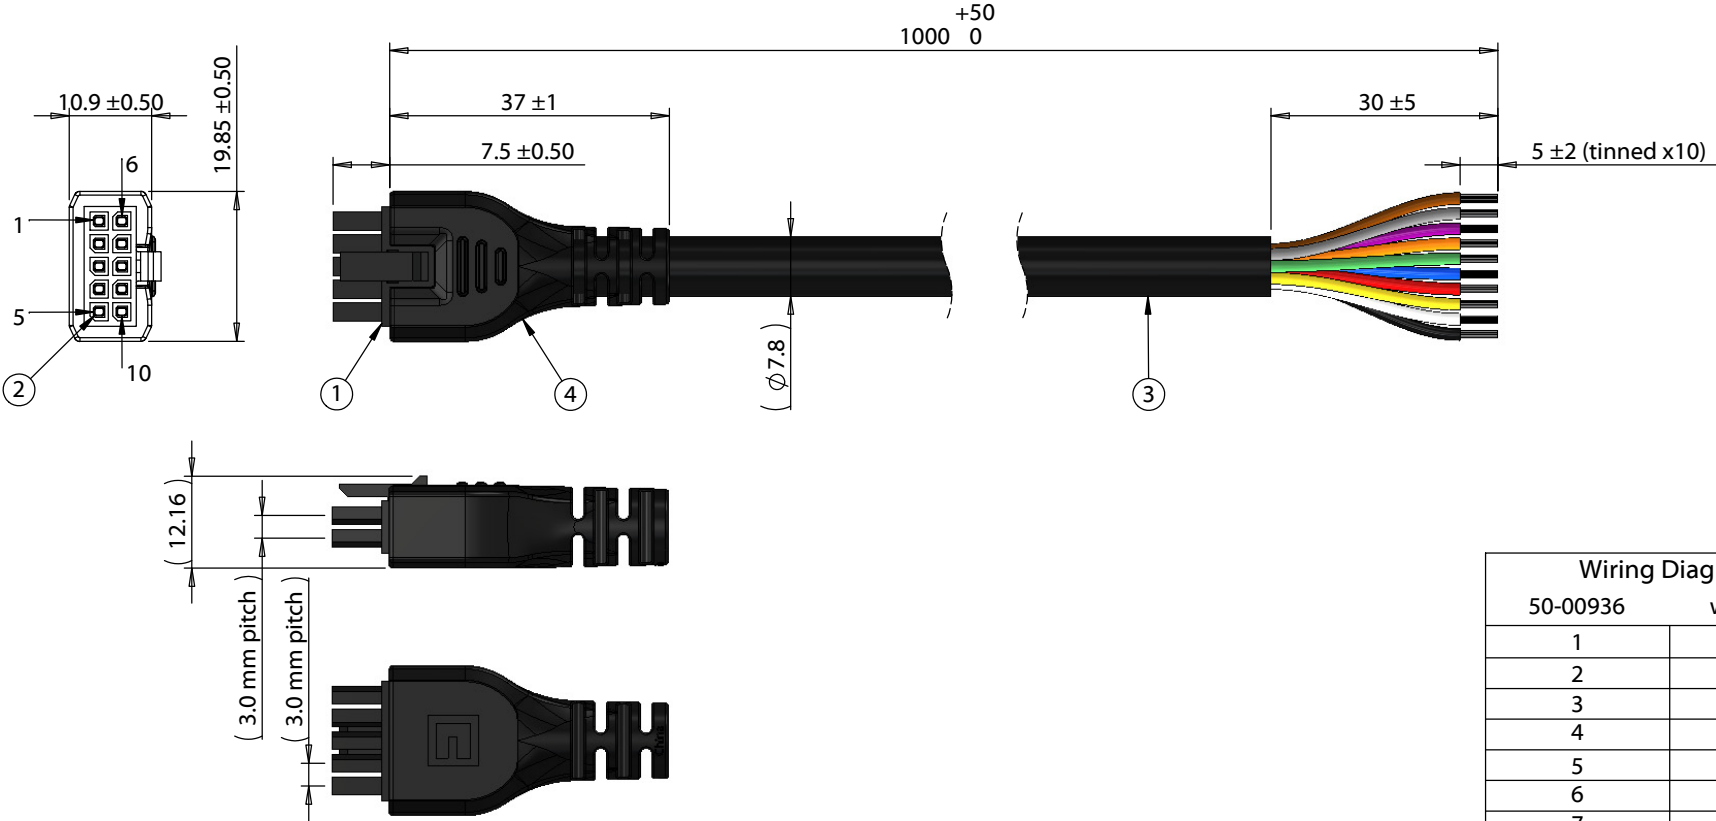

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com Size: A Part number: 10-03449 Scale: 1:1 Sheet 1 of 1
A	10/29/2019	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances:	Description:	
			X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1000 mm, 10C, 3.0 mm pitch dual row rectangular housing socket to stripped tinned, overmold	

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com