


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00011	Connector, dc plug, 5.5x2.5xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC	1	
3	24-00017	Overmold, PVC	1	black

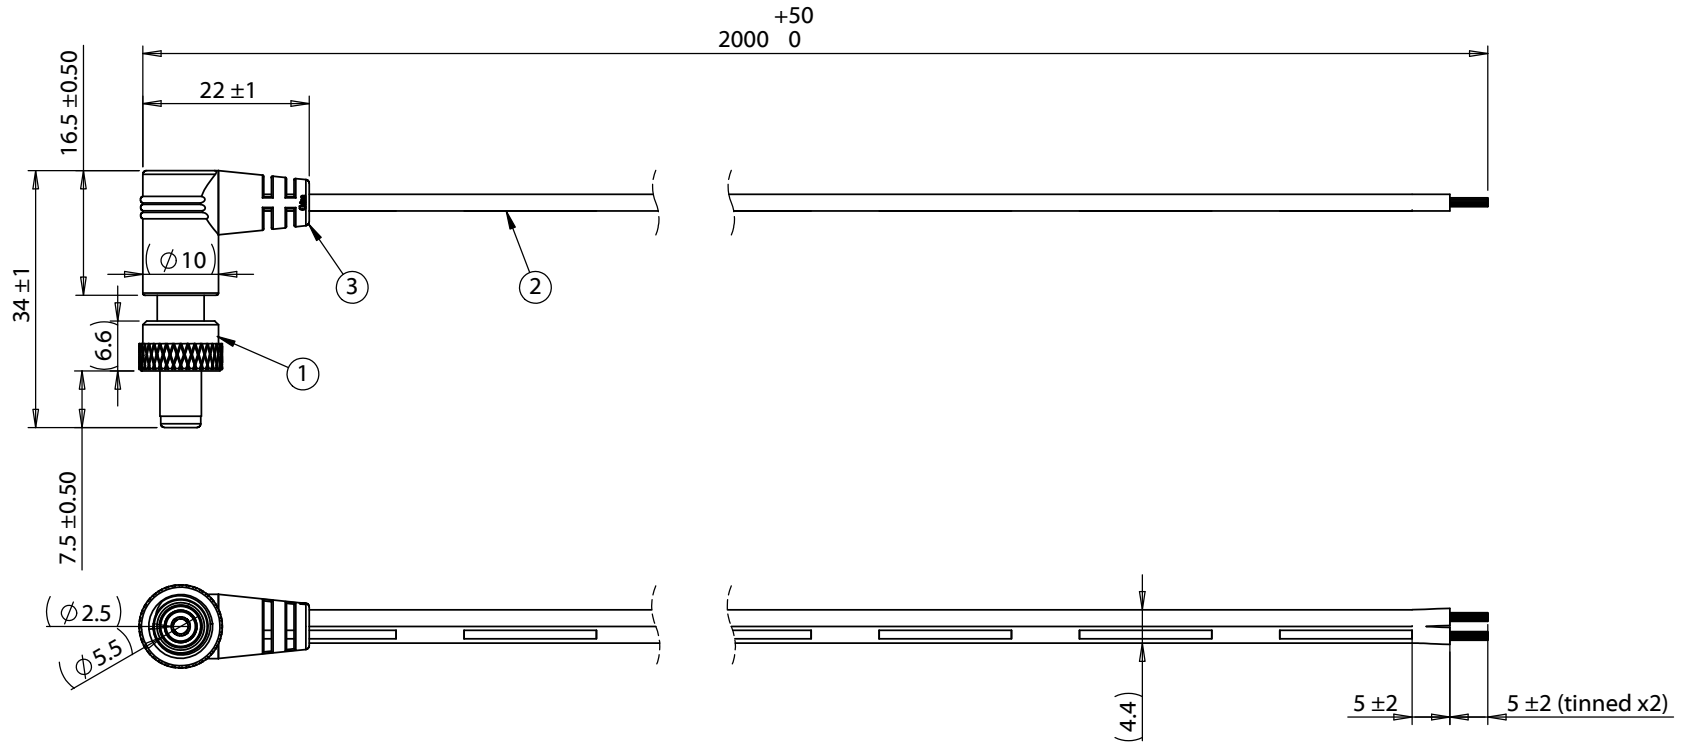

Notes:

Electical requirement: 6.5 A, 48 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00011	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	5/28/2009	Initial release		RoHS and REACH compliant					
A1	2/06/2012	Updated connector description	Verified:	Function test: no open, no short circuit, no intermittent					
A2	7/30/2012	Included wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 2000 mm, 5.5x2.5x7.5mm 90° 50-00011 locking dc plug to 5mm tinned, 18 AWG, UL2468, 30-00007					
A3	8/29/2016	Modified overmold & connector lengths			<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-00124</td> </tr> </table>	Size:	Part number:	A	10-00124
Size:	Part number:								
A	10-00124								
					<table border="1"> <tr> <td>Scale: 1:2</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale: 1:2		Sheet 1 of 1	
Scale: 1:2		Sheet 1 of 1							

5

4

3

2

1